




### 12 CORE FTTx Riser Cable

#### Applications

- ◆ Used as access building cable in premises distribution system, especially used in indoor or outdoor aerial access cabling
- ◆ Used in access network or as access cable from outdoor to indoor in customer premises network;

#### Features

- ◆ Good mechanical and environmental properties;
- ◆ Flame retardant property meets the requirements of relevant standards;
- ◆ The mechanical characteristics meet the requirements of relevant standards;
- ◆ Soft,flexible,easy to splice,and with big capacity data transmission;
- ◆ Meet various requirements of market and clients.

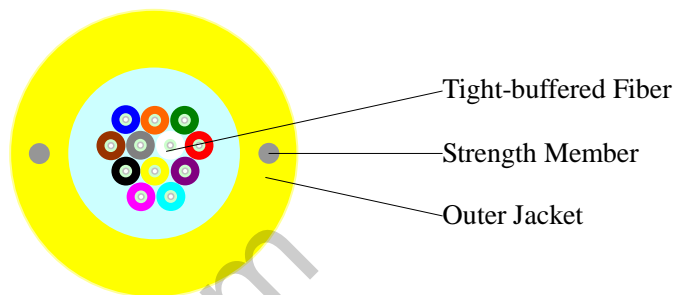

#### Cable Parameters

| Fiber Count | Cable Dimension (mm) | Tensile(N) |            | Crush.(N/100mm) |            | Min .Bend Radius(mm) |        | Range of Temp(°C) |
|-------------|----------------------|------------|------------|-----------------|------------|----------------------|--------|-------------------|
|             |                      | Long Term  | Short Term | Long Term       | Short Term | Dynamic              | Static |                   |
| 12          | 10                   | 200        | 500        | 300             | 1000       | 15                   | 10     | -20~+60           |


### 24 CORE FTTx Riser Cable

#### Applications

- ◆ Used as access building cable in premises distribution system, especially used in indoor or outdoor aerial access cabling
- ◆ Used in access network or as access cable from outdoor to indoor in customer premises network;

#### Features

- ◆ Good mechanical and environmental properties;
- ◆ Flame retardant property meets the requirements of relevant standards;
- ◆ The mechanical characteristics meet the requirements of relevant standards;
- ◆ Soft,flexible,easy to splice, and with big capacity data transmission;
- ◆ Meet various requirements of market and clients.

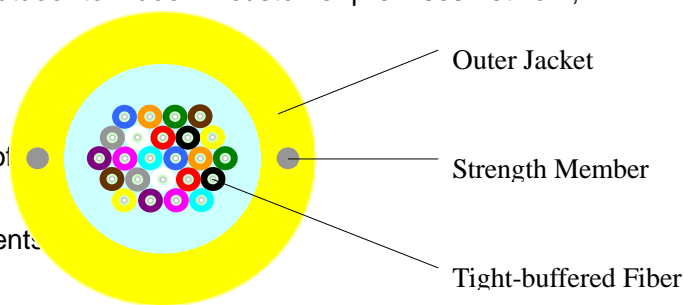

#### Cable Parameters

| Fiber Count | Cable Dimension (mm) | Tensile(N) |            | Crush.(N/100mm) |            | Min .Bend Radius(mm) |        | Range of Temp(°C) |
|-------------|----------------------|------------|------------|-----------------|------------|----------------------|--------|-------------------|
|             |                      | Long Term  | Short Term | Long Term       | Short Term | Dynamic              | Static |                   |
| 24          | 12                   | 200        | 500        | 300             | 1000       | 15                   | 10     | -20~+60           |