




### Breakout Cable 2 Core Type I

#### Applications

- ◆ Use in pigtails and patch cords;
- ◆ Used as connectors in optical communication equipment rooms and optical distribution frames;
- ◆ Used as pigtails and patch cord

#### Features

- ◆ Good mechanical and environmental properties;
- ◆ Flame retardant property meets the requirements of relevant standards;
- ◆ The mechanical characteristics meet the requirements of relevant standards;
- ◆ Soft,flexible,easy to splice,and with big capacity data transmission;
- ◆ Meet various requirements of market and clients

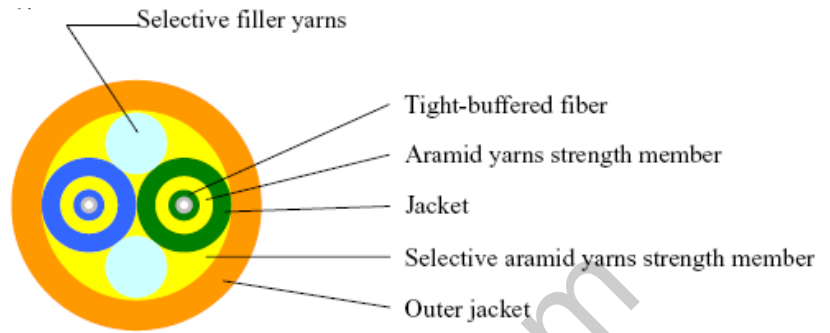

#### Cable Parameters

Fiber Count	Cable Dimension (mm)	Cable Weight (kg/km)	Tensile(N)		Crush.(N/100mm)		Min .Bend Radius(mm)		Range of Temperatures (°C)
			Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
2	6.0	25.3	200	400	200	1000	20D	10D	-20~+60
2	7.2	30.0	250	500	200	1000	20D	10D	-20~+60


### Breakout Cable 2 Core Type II

#### Applications

- ◆ Use in pigtails and patch cords;
- ◆ Used as connectors in optical communication equip
- ◆ Used in indoor cabling

#### Features

- ◆ Good mechanical and environmental properties;
- ◆ Flame retardant property meets the requirements of relevant standards;
- ◆ The mechanical characteristics meet the requirements of relevant standards;
- ◆ Soft,flexible,easy to splice,and with big capacity data transmission;
- ◆ Meet various requirements of market and clients.

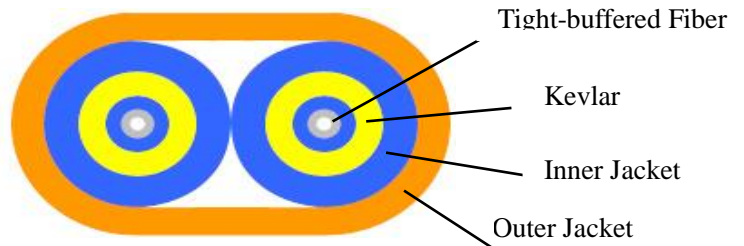

#### Cable Parameters

Fiber Count	Cable Dimension (mm)	Cable Weight (kg/km)	Tensile(N)		Crush(N/100mm)		Min .Bend Radius(mm)		Range of Temperatures (°C)
			Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
2	2.8x4.8	9.4	100	200	200	1500	100	35	-20~+60
2	3.0x5.0	11.3	100	200	200	1500	100	40	-20~+60
2	4.0x7.0	18.0	160	300	200	1500	100	40	-20~+60