



FTTH Terminal Box

◆ 4 Port FTTH Box(HY-20-T4A)

Order Information:



Item	HY-20-T-4A
Dimension	150x110x30mm
Maximum Fiber Capacity	4/8
Adaptor	4XSC simplex,4XLC duplex,4xFC simplex,4XE200 simplex
Cable	900um or Drop cable
Material	PC+ABS
Net weight(kg)	0.1
Operation temperature	-20°C to + 50°C

◆ Compact FTTH Terminal Box(HY-20-T4B)


Order Information:



Item	HY-20-T-4B
Dimension	120x80x25mm
Maximum Fibre Capacity	4/8
Maximum no. of customer feeds:	4/8 pigtails
Material	FR High Impact Polystyrene
Number of splice trays	1
Net weight (kg):	0.50
Operating temperature	-20°C to + 50°C (5 to 95% RH)

◆ Mini FTTH 4 Port Terminal Box(HY-20-T4C)

Order Information:

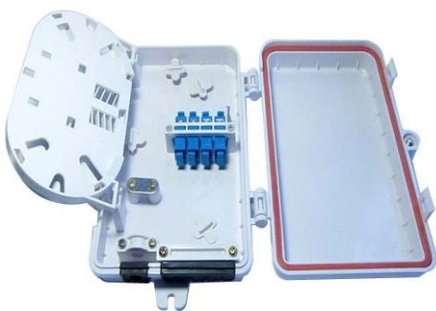

Item	HY-20-T-4C
Dimension	210x140x40mm
Cable Diameter(mm)	Φ 7~Φ 10
Adaptor	4XSC simplex,4X LC duplex
Color	white
Material	ABS
Net Weight(kg)	0.26
Operation Temperature	-20°C to + 50°C
Cable Ports	1+4
Max Capacity of Splice	4(single fiber)
Protection Class	IP67


www.hy-fiber.com

www.hy-fiber.com



◆ FTTH 8 Port Terminal Box(HY-20-T-8A)

Order Information:

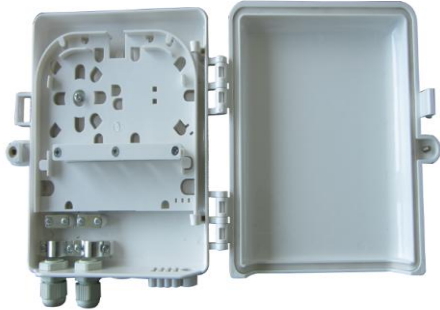

Item	HY-20-T-8A
Dimension	230x220x65mm
Maximum Fiber Capacity	8/16
Adaptor	8XSC simplex,8XLC duplex,8xFC simplex,8XE200 simplex
Cable	900um or Drop cable
Material	ABS
Net weight(kg)	0.55
Operation temperature	-20 °C to + 50°C

◆ FTTH 8 Port Terminal Box(HY-20-T8B)

Order Information:



Item	HY-20-T8B
Dimension	180x170x30mm
Maximum Fiber Capacity	8
Adaptor	8XSC simplex,8X LC duplex
Color	grey
Material	ABS
Net Weight(kg)	0.25
Operation Temperature	-20 °C to + 50°C

◆ 8 port Rectangle FTTH Fiber Optic Terminal Box (HY-20-T8C)

Order Information:



Item	HY-20-T8C
Dimension	230x150x40mm
Adaptor	8XSC/ST/FC simplex,8X LC duplex,6×SC duplex, etc
Color	Black
Material	Cold Rolled Steel
Material thickness	1.0 mm
Material coating	Electro Static Powder Coating
Net Weight(kg)	0.85
Operation Temperature	-40 °C to + 70°C
IP Rating	IP20



◆ 12 port FTTH terminal box(HY-20-T12B)

Order Information:



Item	HY-20-T12B
Dimension	225x195x65mm
Capacity	12 fibers/24 fibers
Adapter	12xSC simplex, 12xLC Duplex
Operation Temperature	-40 °C to + 60°C

◆ 16 port FTTH terminal box(HY-20-T16A)

Order Information:



Item	HY-20-T16A
Dimension	318x260x90mm
Maximum Fiber Capacity	16/32
Adaptor	16XSC simplex,16XLC duplex
Cable	900um or Drop cable
Material	ABS
Net weight(kg)	1.15
Operation temperature	-20 °C to + 50°C

◆ 24 port FTTH terminal box(HY-20-T24B)

Order Information:



Item	HY-20-T24B
Dimension	320x235x100 mm
Capacity	24fibers
Adapter	24xSC simplex, 24xLC Duplex
Operation Temperature	-40 °C to + 60°C

www.hy-fiber.com

www.hy-fiber.com