



FTTH Wall-outlet Box

◆ FTTH Wall-outlet Box 8686 Series HY-20-W-A



Order Information:

Item	HY-20-W-A
Dimension	86x86x23mm
Maximum Fiber Capacity	2/4
Adaptor	2XSC simplex,2XLC duplex
Cable	900um or Drop cable
Material	ABS
Net weight	53g
Operation temperature	-20℃ to +50℃

◆ FTTH Wall-outlet Box 8686 Series HY-20-W-B



Order Information:

Item	HY-20-W-B
Dimension	86x86x20mm
Maximum Fiber Capacity	2/4
Adaptor	2XSC simplex,2XLC duplex
Cable	900um or Drop cable
Material	ABS
Net weight	47g
Operation temperature	-20℃ to +50℃

◆ FTTH Wall-outlet Box 8686 Series HY-20-W-C



Order Information:


Item	HY-20-W-C
Dimension	86x86mm
Maximum Fiber Capacity	2/4
Adaptor	SC /LC
Cable	900um or Drop cable
Material	ABS
Net weight	50g
Operation temperature	-20℃ to +50℃

www.hy-fiber.com

www.hy-fiber.com




◆ FTTH Wall-outlet Box 8686 Series HY-20-W-D

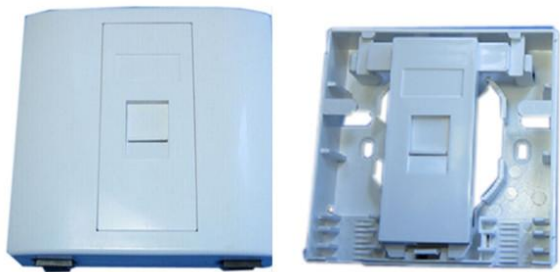

Order Information:

Item	HY-20-W-D
Dimension	86x86x20mm
Maximum Fiber Capacity	2/4
Adaptor	2XSC simplex,2XLC duplex,1 XRj45
Cable	900um or Drop cable
Material	PC
Net weight	65g
Operation temperature	-20°C to + 50°C


◆ Mini FTTH Terminal Box HY-20-T1A

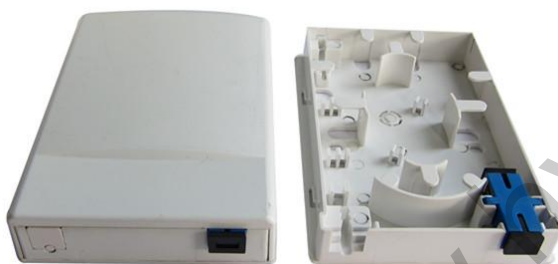

Order Information:

Item	HY-20-T-1A
Dimension	125x90x25mm
Maximum Fiber Capacity	2
Adaptor	1XSC simplex,1X LC duplex
Cable	900um or Drop cable
Material	ABS
Net weight	78g
Operation temperature	-20°C to + 50°C

◆ FTTH Wall Outlet HY-20-T-1B

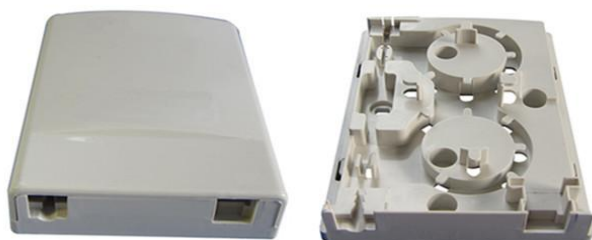

Order Information:

Item	HY-20-T-1B
Dimension	120x90x25mm
Maximum Fiber Capacity	2
Adaptor	1XSC simplex,1X LC duplex
Color	White
Material	ABS
Net Weight	75g
Operation Temperature	-20°C to + 50°C



◆ FTTH Wall Outlet HY-20-T-2A

www.hy-fiber.com



Order Information:

Item	HY-20-T-2A
Dimension	200×110×40mm
Maximum Fiber Capacity	4
Maximum Number of Customer	4 patch cords
Feeds	
Color	grey
Material	ABS
Net Weight	190g
Operation Temperature	-20℃ to + 50℃
Adaptor	2 ×SC simplex , 2 ×LC duplex
Input Cable Diameter	3-7mm
Number of Input Cable Positions	4

900um Buffered Tube

Features:

- ◆ 900um outside diameter
- ◆ 12 colors available
- ◆ Up to 110℃
- ◆ PVDF UL material
- ◆ Low Shrink rate

Order Information:



www.hy-fiber.com

Item	900um Buffered Tube
Material	PVDF(Polyvinylidene Fluoride)
Tensile Strength	18 Mpa
Elongation	50-300%
Specific Gravity	1.78g/cm ³
Dielectric Constant	8.5 at 10MHz
Max. Temperature	110 ℃
Min. Operating Temperature	0 ℃
Outer Diameter	0.89mm
Inner Diameter	0.38mm
Colors Available	White,Black,Red,Blue,Orange,Yellow,Brown,Green,Grey,Pink,Violet,Aqua