




Fiber Optical Drop Cable I

Applications

- ◆ Used as access building cable;
- ◆ Used in indoor cabling, especially used for FTTH;

Features

- ◆ Good mechanical and environmental properties;
- ◆ Flame retardant property meets the requirements of relevant standards;
- ◆ The mechanical characteristics meet the requirements of relevant standards;
- ◆ Soft,flexible,easy to splice,and with big capacity data transmission;
- ◆ Meet various requirements of market and clients.

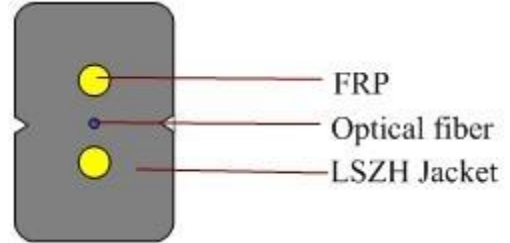

Cable Parameters

Fiber Count	Cable Dimension (mm)	Cable Weight (kg/km)	Tensile(N)		Crush.(N/100mm)		Min .Bend Radius(mm)		Range of Temp(°C)
			Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
1~2	3.1x2.0	8.2	60/100	100/200	500/1000	1000/2200	20H	10H	-20~+60
3~4	4.0x2.0	8.2	60/100	100/200	500/1000	1000/2200	20H	10H	-20~+60


Fiber Optical Drop Cable II

Applications

- ◆ Used as access building cable in premises distribution system, especially used in indoor or outdoor aerial access cabling
- ◆ Used in access network or as access cable from outdoor to indoor in customer premises network;

Features

- ◆ Good mechanical and environmental properties;
- ◆ Flame retardant property meets the requirements of relevant standards;
- ◆ The mechanical characteristics meet the requirements of relevant standards;
- ◆ Soft,flexible,easy to splice,and with big capacity data transmission;
- ◆ Meet various requirements of market and clients

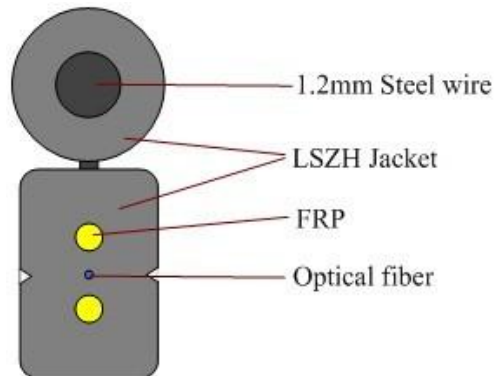

Cable Parameters

Fiber Count	Cable Dimension (mm)	Cable Weight (kg/km)	Tensile(N)		Crush.(N/100mm)		Min .Bend Radius(mm)		Range of Temp (°C)
			Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
1~2	5.0x2.0	17.7	300	600	1100	2200	20H	10H	-20~+60