




Fiber Optical Patch Cord



SC Type

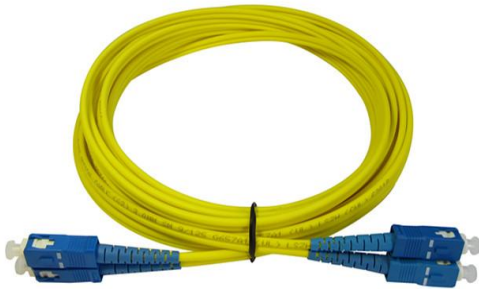

LC Type




ST Type



FC Type

Order Information:

Item	Single Mode	Multi Mode
Insertion loss(dB)	≤0.3	≤0.3
Temperature(°C)	-40~+80	-40~+80
Repeatability(dB)	1000 times variable < 0.2 dB	1000 times variable < 0.2 dB
Interchange(dB)	≤0.2	≤0.2
Return loss(dB)	PC≥45,UPC≥50,APC≥65	N/A
Cable diameter(mm)	∅3.0, ∅2.0, ∅0.9	
Ferrule material	Zirconia Ceramic	

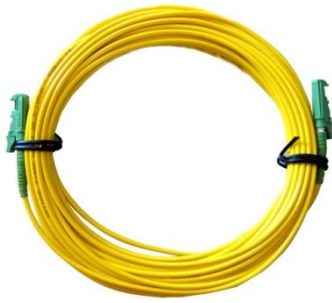

E2000 type



MTRJ type



FDDI type



D4 type



SMA type



MU type

Order Information:

Item	Single Mode	Multi Mode
Insertion loss(dB)	≤0.3	≤0.3
Reflection loss(dB)	PC≥45,UPC≥50,APC≥65	N/A
Connection wear(dB)	≤0.2	< 0.2
Repeatability(dB)	1000 times variable < 0.2 dB	1000 times variable < 0.2 dB
Interchangeability	≤0.2	≤0.2
Temperature(°C)	-40~+80	-40~+80
Core Type(MTRJ Type)	Duplex	
Cable diameter(mm)	Ø3.0, Ø2.0, Ø0.9 (only Ø2.0 is available for MTRJ)	

www.hy-fiber.com

www.hy-fiber.com